Kingbright
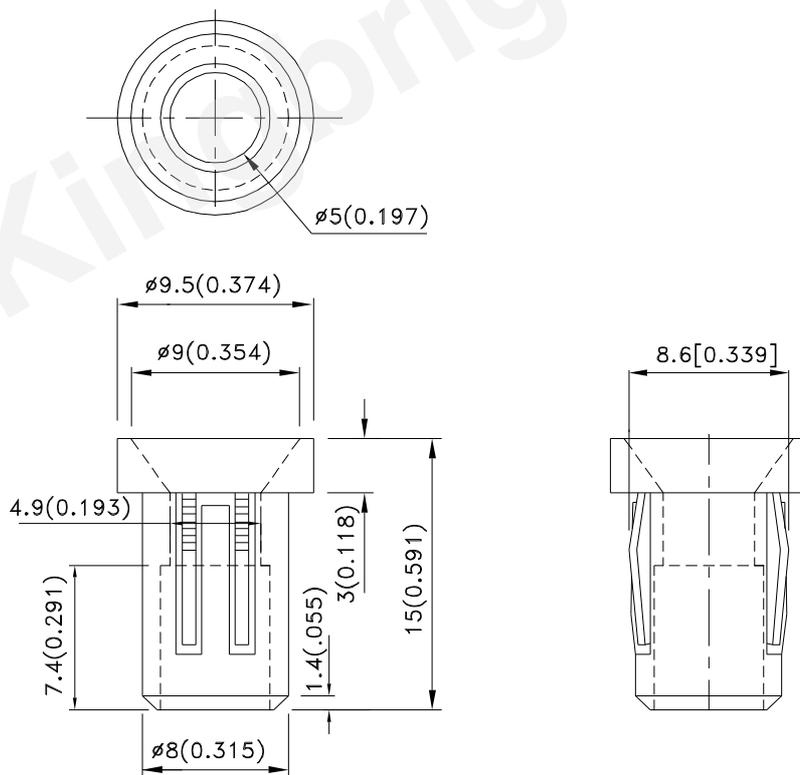
Part Number: RTF-5020

Features

● Suitable for back panel illumination, circuit board indicator, LED indicator.

● Housing UL rating:94V-0.

● Housing material: type 66 nylon.

● Recommended hole size:Φ8.3mm.

● RoHS compliant.

Package Dimensions

ø5(0.197)

ø9.5(0.374)

ø9(0.354)

8.6[0.339]

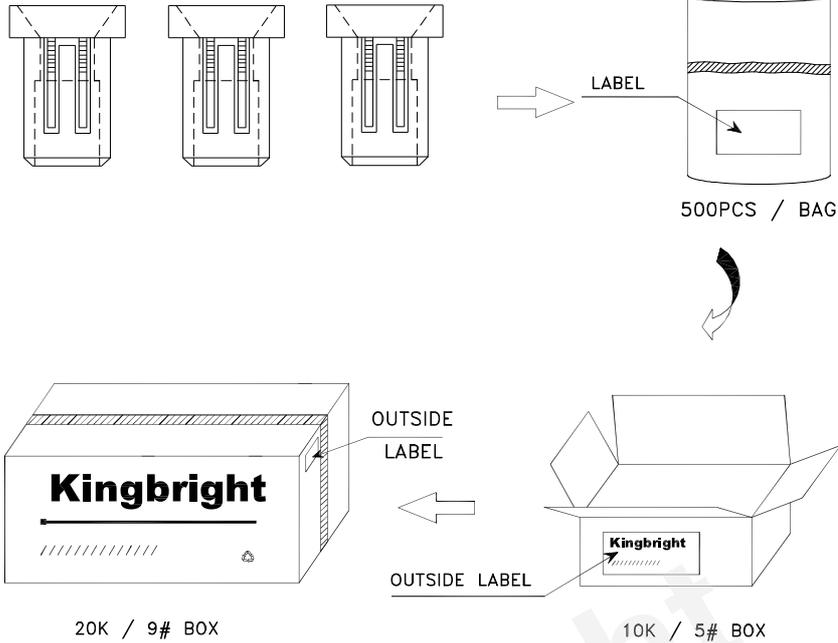4.9(0.193)

3(0.118)

15(0.591)

7.4(0.291)

1.4(.055)

ø8(0.315)

Notes:
1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25(0.01") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

Kingbright

PACKING & LABEL SPECIFICATIONS   RTF-5020

LABEL

500PCS / BAG

OUTSIDE
LABEL

Kingbright

//////////////

20K / 9# BOX

OUTSIDE LABEL

Kingbright

10K / 5# BOX

Kingbright

P/NO: RTF-5020

QTY: 500 pcs   Q.C.   Q C
S/N: XXXX   XX XX XXXX
CODE: XXX   PASSED

LOT NO:

xxxxxxxxxxxxxxxxxxxxxxxx

RoHS Compliant

Terms and conditions for the usage of this document

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.

2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.

3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.

4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.

5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.

6. All design applications should refer to Kingbright application notes available at http://www.kingbright.com/application_notes